## **EUROPEAN PATENT OFFICE**

## Patent Abstracts of Japan

**PUBLICATION NUMBER** 

**PUBLICATION DATE** 

59215674

05-12-84

APPLICATION DATE

20-05-83

APPLICATION NUMBER

58089481

APPLICANT: SANYO ELECTRIC CO LTD;

INVENTOR:

WASHIMI SHINGO;


INT.CL.

H01M 8/04 G05D 23/19

TITLE

TEMPERATURE CONTROL DEVICE OF

**FUEL CELL** 

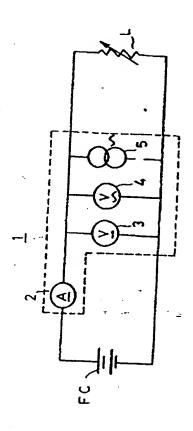

ABSTRACT:

PURPOSE: To detect the cell temperature from outside by measuring the internal impedance of a cell.

CONSTITUTION: An impedance measuring device 1 is connected between a fuel cell FC and a load L and is composed of a DC ammeter 2, a DC voltmeter 3, an AC voltmeter 4, and a constant-frequency, constant-current AC generator 5. The AC generator 5 feeds currents in parallel to the cell FC and the DC load L, and the AC voltage displayed on the AC voltmeter 4 is generated by the resultant impedance Zr of the internal impedance Z of the fuel cell FC and the load resistance R. Accordingly, individual detection signals from the impedance measuring device 1 are inputted to a control unit 6 to calculate the internal impedance Z of the cell. The value of this Z depends on the cell temperature, thereby this Z is used as an output signal to regulate a damper 7 and a blower 8 so as to control the feed air temperature and air quantity.

COPYRIGHT: (C)1984,JPO&Japio